


## White S626.9/40 (200µm)


### Optical and Solar Properties

	Testmethod	Unit	Reference	2000 h
Light Reflexion Grade	Rvis	%	33,7	33,9
Solar Reflexion Grade	Rsol	%	24,6	24,8
Light Transmission Grade	Tvis	%	62,1	62,0
Solar Transmission Grade	Tsol	%	68,4	68,2
UV-Transmission Grade	Tuv	%	27,7	26,8
Shading Coefficient	SC	-	0,88	0,88
Solar Heat Gain Coefficient	SHGC	-	0,7	0,7
Colour Rendering Index	CRI	-	95,7	95,6

### Transmission / Reflection

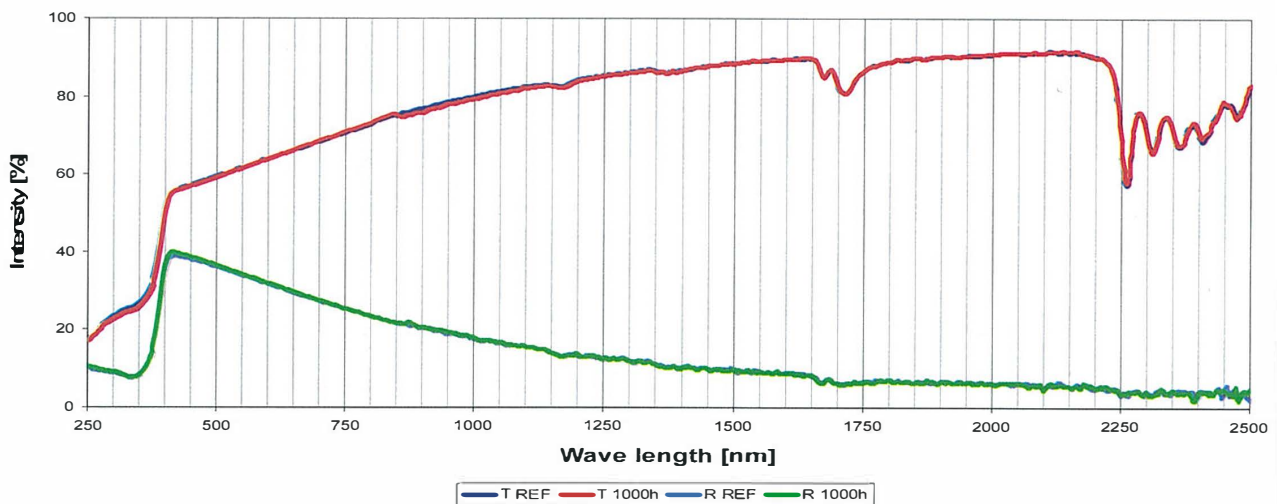

### Weatherability according to ISO 4892/2 Hunterlab – Lab-Standard

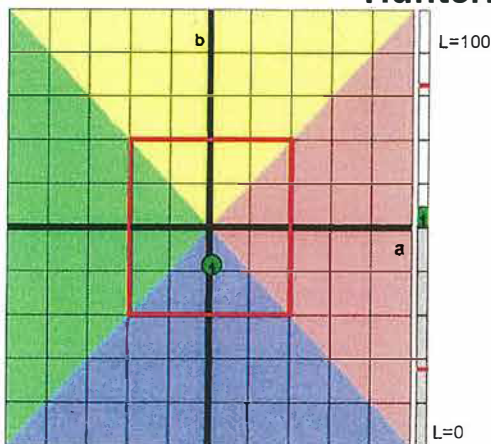

	Reference	2000h
L	92,56	92,79
a	-1,09	-1,02
b	0,75	-0,12
Opacity (%)	40	40

#### Evaluation:

- Stable
- Conditionally Stable
- Visible Discolouring
- Discolouring
- Unstable